

DX-IC8

**TWO-WAY 8-INCH HIGH OUTPUT
CEILING MOUNT LOUDSPEAKER**



FEATURES

- High intelligibility with exceptional uniform coverage
- Fast installation with SpringLock™ mounting clamps
- Consistent, wide dispersion up to 16 kHz
- Attractive edgeless magnetic grille design
- Conduit knock-outs on the input cover meet plenum air space handling requirements

TECHNICAL SPECIFICATIONS¹

TECHNICAL SPECIFICATIONS

Operating Mode	Passive with DSP		
Operating Environment	Indoor		
Operating Range (-10dB) ²	60 Hz to 20 kHz		
Nominal Beamwidth (H x V)	100°, conical		
Transducers	LF 1 x 8" (165mm) HF 1 x 1.25" (32mm) exit compression driver		
Sensitivity ³	95dB (2.83V)		95dB (1W at rated impedance 8 Ω)
Nominal Continuous Power Handling ⁴	Passive	28V (150W @ 8Ω)	
Nominal Maximum SPL ⁵	Passive	Peak 123dB	Continuous 117dB
Autoformer	70V: 120W, 60W, 30W, 15W; 100V: 120W, 60W, 30W		
Recommended Amplifiers	Passive	150W - 300W @ 8Ω, (35V - 49V)	
Crossover Frequency	1.3 kHz		
Required Accessory	60 Hz Electronic high pass filter		

APPLICATIONS

Large Conference Rooms · Houses of Worship
Theaters · Sports Facilities · Health Clubs
Convention Centers · Auditoriums
Malls · Airports

DESCRIPTION

The Desono DX-IC8 rewrites the cost-to-performance equation for high-end ceiling loudspeakers. Able to fulfill a wide variety of needs, the DX-IC8 exceeds the performance of competing "high-ceiling" models. Foreground music, high-level paging, and augmentation of large music systems as a delay or fill speaker in ancillary zones are all within the capability of this versatile performer. It is ideal for high ceiling applications.

Uniform voicing among the Desono DX product family makes for an easy match to the other models in the series, while a host of design innovations set the DX-IC8 apart from other products in its size and price range. Featuring genuine coaxial design with separate magnets for the LF and HF drivers, the DX-IC8 exhibits reduced distortion and industry-leading sensitivity permitting 3 dB to 6 dB greater output level, while requiring half the amplification power of competing products.

Patent-pending SpringLock™ clamps allow single-handed placement to speed installation and reduce labor time. The SpringLock spring-loaded clamps support the back can on the included tile rails and snap-on C-ring, so that the installer no longer needs to hold the can against the tile while tightening the clamps.

The front-face wattage selector switch enables quick adjustment of 70V/100V tap levels. A variety of installation accessories are available to accommodate different ceiling materials.

PHYSICAL

Input Connection	4-position Euroblock connector
Controls	Front-face wattage / low impedance selector switch
Mounting Provisions	4 SpringLock mounting clamps with 3-inch grip range
Certifications	ETL listed to comply with UL1480, UL2043 and CSA62368-1 Suitable for use in air handling spaces per NFPA 70 and NFPA 90
Dimensions W x D	341 mm x 216 mm (13.43" x 8.51")
Weight	TBD
Finish	Refer to the Technical Drawing (page 2)
Accessories (included)	C-Ring supporting plate, tile support bridge rails, grille, paint mask, cut-out template, flat screwdriver
Model	DX-IC8-W - loudspeaker with White grille

OPTIONS

Accessories	New Construction Brackets (SPA-NC500) Black Grilles (SPA-GRB500) High Humidity Grilles (SPA-GHH500) 48" Tile Rails (SPA-RAIL48) Plenum-rated Dual-RJ45 Adapter (SPA-CCA200)
-------------	---

Biamp strives to improve its products on a continual basis. Specifications are therefore subject to change without notice.

DX-IC8 TWO-WAY 8-INCH HIGH OUTPUT CEILING MOUNT LOUDSPEAKER

TECHNICAL DRAWING / DIMENSIONS / FINISH

W (bezel diameter) x D

341 mm x 216 mm (13.43" x 8.51")

Cutout Diameter

310 mm (12.20")

Unit Weight

TBD


Shipping Weight

TBD (shipped in pairs)


Grille:

Powder-coated perforated steel backed with color-matched woven fabric with safety line. White finish.


Enclosure / Finish

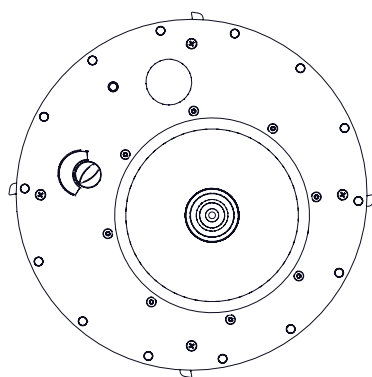 Back Can: Black, Matte finish Steel
 Face: Reflex loaded UL 94V-0 rated ABS plastic, paintable Black finish.


Front (no grille)

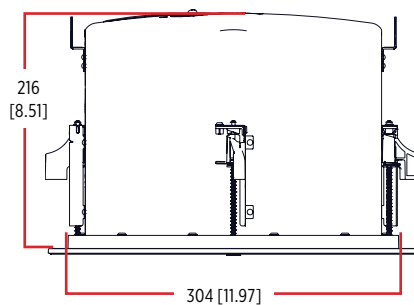

Side

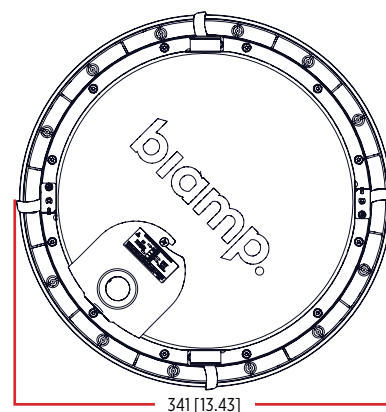

Top

NOTES

1. TECHNICAL SPECIFICATIONS All measurements are taken indoor using a time- windowed and processed signal to eliminate room effects, approximating an anechoic environment at a distance of at least 6.0 m. All acoustic specifications are rounded to the nearest whole number. An external DSP using settings provided by Biamp is required to achieve the specified performance; further performance gains can be realized using the FIR loudspeaker optimization presets available in Biamp's Amplified Loudspeaker Controllers (ALCs).

2. OPERATING RANGE The frequency range over which the on-axis processed response remains within 10 dB of the average SPL.

3. SENSITIVITY The broadband SPL of the loudspeaker when pink noise is applied (band limited to the loudspeaker's Operating Range) at an input voltage of 2.83 V, in accordance with IEC 60268-5. Also listed for a voltage that would produce 1 watt into the nominal impedance. Measured in whole space with no external processing applied, except where indicated.

4. CONTINUOUS POWER HANDLING The maximum continuous input voltage at the stated nominal impedance that the system can withstand, without damage, for a period of 2 hours using an IEC 60268-5 defined spectrum with recommended signal processing and protection filters.

5. NOMINAL MAXIMUM SPL The SPL produced when an IEC 60268-5 signal is applied to the equalized loudspeaker system, at a level which drives at least one subsection to its rated continuous input voltage limit, referenced to a distance of 1 meter. The peak SPL represents the 2:1 (6 dB) crest factor of the IEC 60268-5 test signal.