The IPD-Hub 2

The IPD-Hub 2 amplifier provides PoE and IP-based audio solutions for use in multi-zone applications utilizing passive speakers. The amp features local and Dante inputs providing unprecedented network control for commercial audio in numerous applications without the need for a traditional DSP.

IPD-Hub 2

Description	Powered Dante, 2-channel DSP amplifier
Input Power	PoE, PoE+, 40W PoE, 24v PS
Mounting	Screw-in Base
Input Power	PoE, Phoenix and barrel connector
Inputs	2 x RJ-45, 1 Dante, 1 local input
Outputs Connector	2-Channel Phoenix
Speakers	2 x 8 Ohm or 4 x 16 Ohm speakers
Output Power w/ 40w PoE	12w / ch
Height	1.75" / 44.45 mm
Width	8" / 203.2 mm
Depth	6" / 152.4 mm
Regulatory - CE	Yes
Regulatory - UL/cUL	60065, CE





RVC

Remote single gang decora volume and source selector for use with a Hub 2

Rotary volume knob


2-position source selector

White and black plates included





Midsize Restaurant

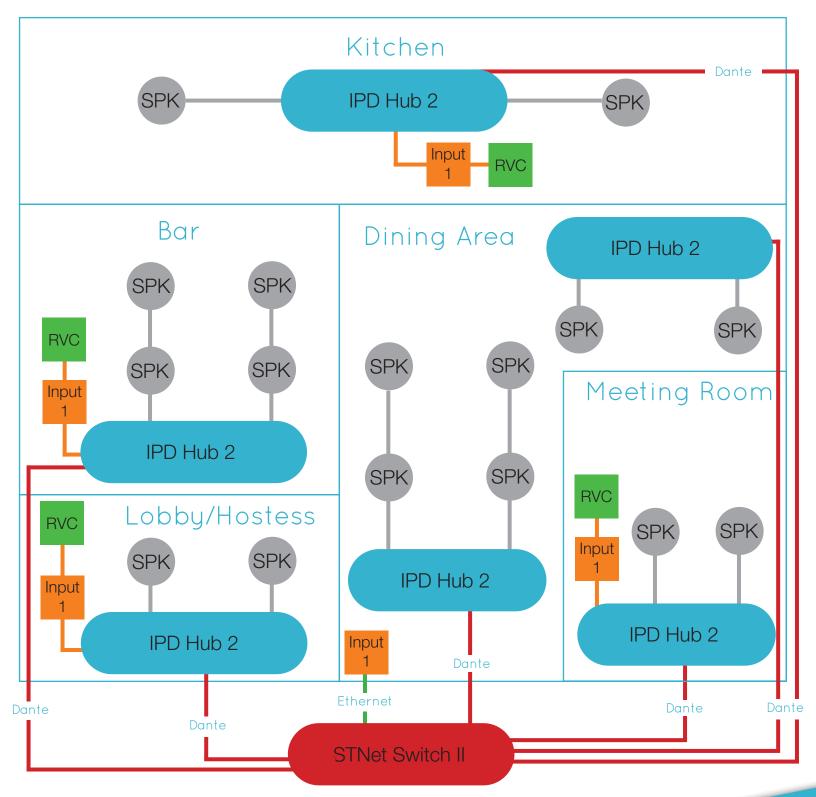

Duckers can be set up to give the Dante inputs priority.