



### Specifications: RS42-EZ-WH & RS42-EZ-BK Mounting hardware included

System Type	4.0" Coax, open-ceiling, ported (20 Watt transformer for 25/70.7/100 Volt or voice coil direct)	
Impedance (nominal) <sup>1</sup>	16 ohm	
Sensitivity dB @ 2.83 V/1 m	82.4 dB	
Sensitivity dB @ 1 W/1 m <sup>2</sup>	85.4 dB	
Sensitivity dB @ 1 W/4 m	70.0 dB	
Frequency Response ( - 3 dB) <sup>3</sup>	140 Hz - 22 kHz	
Frequency Response ( - 10 dB) <sup>3</sup>	100 Hz - 22 kHz	
Max. Program Power <sup>4</sup>	40 W	
Max. Continuous Power RMS <sup>5</sup>	20 W	
Max. Power SPL @ 1 m <sup>6</sup>	100.0 dB	
Max. SPL @ 4 m	87.0 dB	
Coverage Angle @ -6dB	500Hz	360°
	1Khz	200°
	2Khz	100°
	4Khz	80°
Coverage Angle (averaged 2-10 kHz)	115°	
Directivity Factor (Q)	2.8 (averaged 100 Hz - 10 kHz); 5.5 (2 kHz)	
Directivity Index (DI)	4.4 dB (averaged 100 Hz - 10 kHz); 7.4 dB (2 kHz)	
Tap Selector	6 Position rotary switch with transformer bypass	
Transducer - Low Frequency Driver	102mm (4in) Polypropylene cone, butyl rubber surround	
Transducer- High Frequency Driver	19mm (0.75in) Silk dome with Beam Ring™	
Low Frequency Voice Coil	25.4 mm (1.00 in)	
Crossover Frequency	4.5 kHz	
Network Type: Low Pass	12dB per octave, 2nd order	
Network Type: High Pass	6dB per octave, 1st order	
Enclosure Material	Injection molded ABS, glass fiber reinforced	
Grille	Powder coated aluminum	
Inputs	4 position ceramic terminal connector	
Colors	Black or white (paintable)	
Height	199.6 mm (7.9 in.)	
Diameter	189.5 mm (7.5 in.)	
Weight	1.4 kg (3.1 lbs.)	
Shipping Weight	1.8 kg (4 lbs.)	
Packaging	One per box	
Included Accessories	Hanging hardware, weather plug, cover plate	
Optional Accessories	N/A	
Regulatory - UL	UL 1480 UEAY	
Regulatory - CE	Approved	
RoHS	Approved	

1 Impedance listed per IEC 60268-5

2 1 W, 1 m sensitivity determined using nominal impedance

3 Frequency response measured in half or full space as dictated by speaker mounting configuration

4 Max program power is 3 dB above max continuous power

5 Continuous power rating, EIA-426-B test

6 Max output based on max continuous power

#### Transformer Taps

	70.7 V	Output	100 V	Output	25 V	Output		
20 W	100.0 dB	218Ω	20 W	100.0 dB	459Ω	2.5 W	91.0 dB	218Ω
10 W	97.0 dB	459Ω	10 W	97.0 dB	926Ω	1.3 W	88.0 dB	459Ω
5 W	94.0 dB	926Ω	5 W	94.0 dB	1815Ω	0.63 W	85.0 dB	926Ω
2.5 W	91.0 dB	1815Ω	2.5 W	91.0 dB	3397Ω	0.31 W	82.0 dB	1815Ω

### Key Features

- One 4 inch (102 mm) coaxial driver with BroadBeam Ring™ technology for consistently smooth high frequency directivity.
- Weatherized components for indoor and outdoor applications.
- Includes hanging hardware with galvanized steel cables and hanging bracket for fast, easy and secure installation. Unit may be hung or mounted direct-to-conduit via locking cover plate.
- Enclosure constructed of injection molded ABS with glass ber reinforcement for lasting durability in indoor or outdoor applications.
- 16 ohm impedance for easy daisy chaining in low voltage systems.
- Aluminum grille with protective powder coated nish.
- Built-in thermal fuse.
- Unit ships in eco-friendly, recyclable packaging.
- UL 1480 UEAY
- High-quality black or white paint nish. Speaker is paintable.
- Included accessories: hanging hardware, weather plug, cover plate.

### Description

The RS42-EZ is a 4-inch, coaxial speaker designed for open-ceiling applications. Hanging hardware is included and features built in hanging bracket and screw on cover plate for fast, easy and secure installation. The unit may be mounted direct-to-conduit via the locking cover plate (see installation instructions for additional information). The RS42-EZ speaker incorporates 4 position ceramic terminal block input connector and a 6 position tap switch with transformer bypass position.

### Applications

Designed for superior off-axis performance and easy installation, the RS42-EZ offers attractive styling in an economical speakers for open-ceiling uses. The RS42-EZ includes hanging cables and a built in mounting plate for suspending the speaker and a threaded opening on top of it's cover plate for direct-to-conduit mounting. Cost-effective engineering with high-performance sound makes the RS42-EZ speaker ideal for

The specifications data was measured in an anechoic chamber, according to EN 54-24. Reference axis: Axis is on the center of speaker grille and perpendicular to the speaker grille. Reference plane: Plane is on the speaker grille and perpendicular to the reference axis. Horizontal plane: Plane is containing the reference axis and perpendicular to the reference plane



music and paging applications in retail, grocery stores, restaurants, hotels, casinos, museums, trade shows and conference rooms. For applications where additional bass is required, SoundTube's RS1001i-II-T 10-inch subwoofer may be used.

### Patented SoundTube Technologies

SoundTube Entertainment and MSE Audio Group constantly develop new technologies that enhance audio product performance. SoundTube Entertainment innovations are protected by multiple U.S. and international patents, which explicitly cover SoundTube dispersion, enclosure and dome technologies. MSE Audio Group actively defends its patents in order to protect SoundTube resellers and end users.

### Technical Data and Specification Tools

#### Technical Data

SoundTube Entertainment strives to provide complete and effective technical information and data to dealers, engineers and designers. All data are available from SoundTube Entertainment or at [www.soundtube.com](http://www.soundtube.com).

Technical data and downloads include:

EASE™ data – 3-D polar plots.

EASE™ Address – 2-D modeling for distributed systems

Autodesk® Revit® software

Tech Sheets – Technical information and architectural specs for system engineers

SoundTubeSPEC™ – Proprietary speaker placement software

#### Data Acquisition and Verification

All data for SoundTube speakers are independently collected from and verified by NWAALabs ([www.nwaalabs.com](http://www.nwaalabs.com)) using their proprietary MACH testing system. All data are collected and analyzed according to ASTM, ISO and AES standards using EASRA, TEF and MLSSA. Full balloon data including both phase and magnitude are compiled into a variety of formats including EASE 4.x, GLL and CLF.

### Architectural Specifications

The loudspeaker shall consist of one 102 mm (4.0 in.) low frequency driver and one 19 mm (0.75 in.) high frequency driver. The low frequency voice coil diameter shall be 25.4 mm (1.0 in.).

Performance specifications of a typical production unit shall be as follows: Useable frequency response shall extend from 100 Hz – 22 kHz (-10 dB). Measured sensitivity (2.83-volt input, 1 meter) shall be at least 82.4 dB. The speaker shall have a nominal impedance of 16 ohms. The speaker shall be available for 25-, 70.7- and 100-volt modes and shall include a six-position tap switch with a transformer bypass position. Rated power capacity shall be at least 20 watts continuous (RMS) and conform to EIA-426-B testing. Maximum continuous output at 1 meter shall be 100.0 dB.

The low frequency transducer shall have a polypropylene cone with a butyl rubber surround. The high frequency transducer shall have a silk dome tweeter with BroadBeam Ring™ technology.

Installation shall be by galvanized steel cable attached to the speaker chassis via xed cable end that interlocks with integrated mounting bracket. The external wiring input connector shall be a four-position ceramic terminal block for low impedance or distributed systems and shall accept from 10 – 22-gauge wire. The system shall be for indoor and outdoor applications and shall have a weather-resistant plug protecting all wire connectors inside the cover plate.

The enclosure shall be constructed of injection-molded ABS. The grille shall be constructed of powder-coated aluminum for lasting performance in the elements. Overall cabinet dimensions shall be no more than 199.6 mm (7.9 in.) in height by 189.5 mm (7.5 in.) in diameter. The unit shall weigh no more than 1.4 kg (3.1 lbs.) and shall include hanging hardware and weather-resistant cover plate plug.

The system shall be the SoundTube RS42-EZ with hanging hardware for both low- and high-impedance applications.

### SoundTube Entertainment


13720 W. 109th St.  
Lenexa, KS 66215  
Phone 913.663.5600  
Fax 913.663.3200  
Toll Free 800.647.TUBE  
[www.soundtube.com](http://www.soundtube.com)

**All SoundTube products come with a 5-year limited warranty.**




## Graphs and Plots


Frequency Response

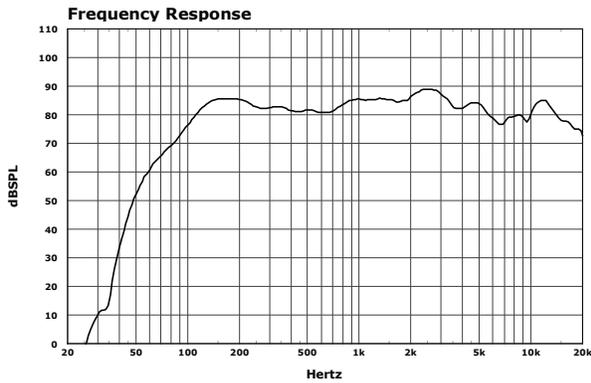



Impedance/Phase

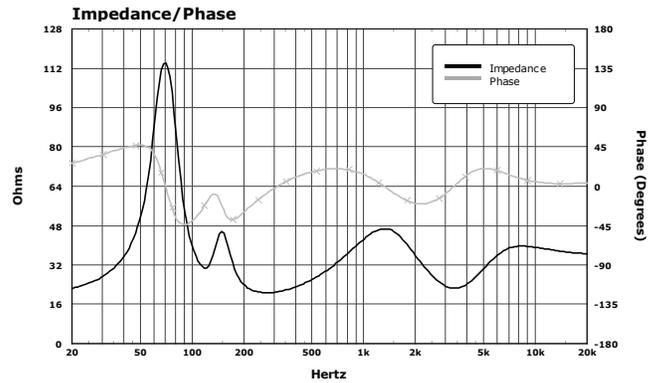

Vertical Beamwidth

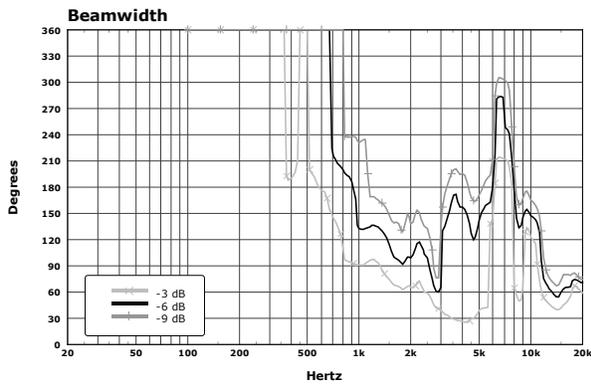

Directivity Index (DI)

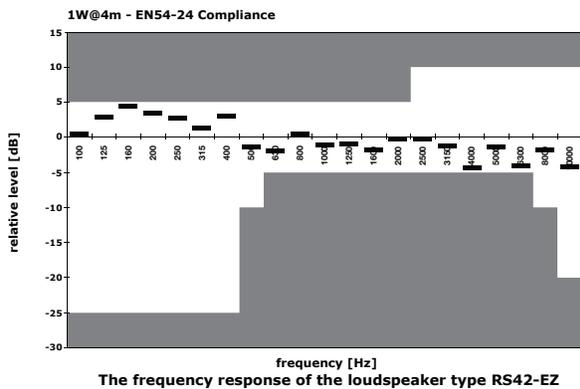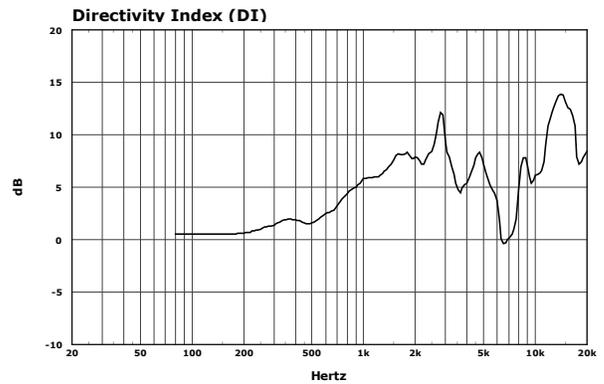

RS42-EZ:


Octave band filter	Declared coverage angle	Measured coverage angle
500 Hz / 1W/4m	360	360
1 kHz / 1W/4m	200	195
2 kHz / 1W/4m	100	95
4 kHz / 1W/4m	80	82,5




### Polar Plots @ 1W/1M

—— Horizontal  
- - - Vertical


#### 125 Hz

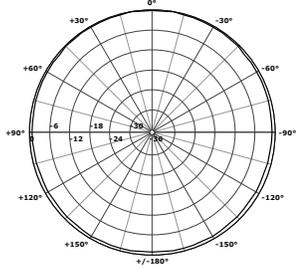


#### 250 Hz

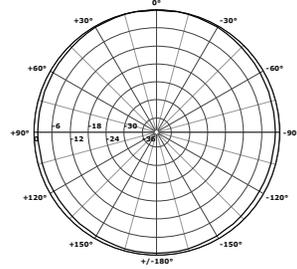


#### 500 Hz

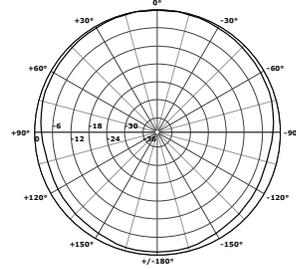


#### 1,000 Hz

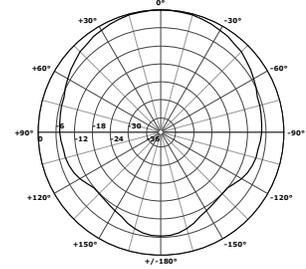


#### 2,000 Hz

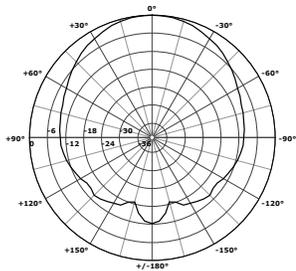


#### 4,000 Hz

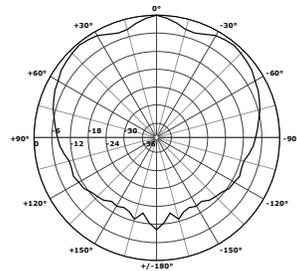

#### 8,000 Hz

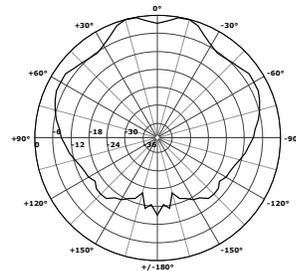

#### 10,000 Hz

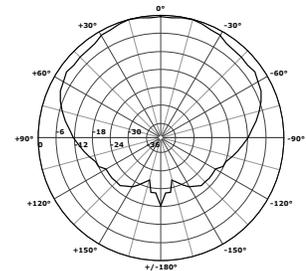

### Mechanical Drawings

