DS-VW755S

SMARTMOUNT®

Full Service Thin Video Wall Mount with Quick Release

FOR 40" TO 65" DISPLAYS

	Display size		Max load
	40"-65"	LB (KG)	**80lb (36.4kg)**

The DS-VW755S Slim Full Service Video Wall Mount with Quick Release offers an easy to install solution for landscape and portrait applications. When overall video wall depth is a concern, the DS-VW755S provides ADA compliance when mounting displays measuring 2" deep or less. Designed for quick service access in recessed video wall applications, the DS-VW755S provides versatility demanded by today's integrator. Tool-less micro adjustment at eight points allows the mount to overcome uneven walls, creating a seamless video wall display. Easy display access and quick serviceability make this mount the ultimate video wall mounting solution.

Additional Features

- ☑ Offers ADA compliance when mounting displays measuring ≤2.0" deep

- ☑ Quick release pop out mechanism provides convenient display access in recessed applications

- ☑ Quick release can be disabled with a locking screw to prevent unintentional pop-outs

- ☑ Display extends into a negative tilt position for ease of service

- ☑ Tool-less micro-adjustments at 8 points allows the mount to overcome uneven walls to create a seamless video wall display

- ☑ Accommodates displays in landscape and portrait orientation

- ☑ Reusable custom wall plate spacers eliminate the guesswork and on-site installation calculations

- ☑ Modular mount for unlimited video wall display configurations

- ☑ Integrated cable management tie-backs make display-to-display cabling simple
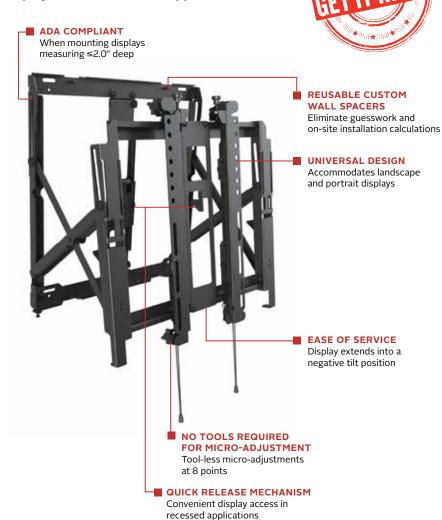
- ☑ VESA® 200 x 200 up to 400 x 400mm compliant

The DS-VW755's quick-release functionality provides quick serviceability and convenient display access in recessed applications.

GET IT RIGHT ™

ADA COMPLIANT
When mounting displays measuring ≤2.0" deep

REUSABLE CUSTOM WALL SPACERS
Eliminate guesswork and on-site installation calculations

UNIVERSAL DESIGN
Accommodates landscape and portrait displays

EASE OF SERVICE
Display extends into a negative tilt position

NO TOOLS REQUIRED FOR MICRO-ADJUSTMENT
Tool-less micro-adjustments at 8 points

QUICK RELEASE MECHANISM
Convenient display access in recessed applications

RoHS 2002/95/EC   MADE IN USA

info@peerless-av.com
peerless-av.com

peerless-AV®

Model Numbers

DS-VW755S	SmartMount® Full Service Thin Video Wall Mount with Quick Release for 40" -65" Displays

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
DS-VW755S	20.00" x 20.00" x 1.87"-2.63" (508 x 508 x 48-67mm)	20lb (9.1kg)	80lb (36.4kg)	Textured	Black

Package Specifications

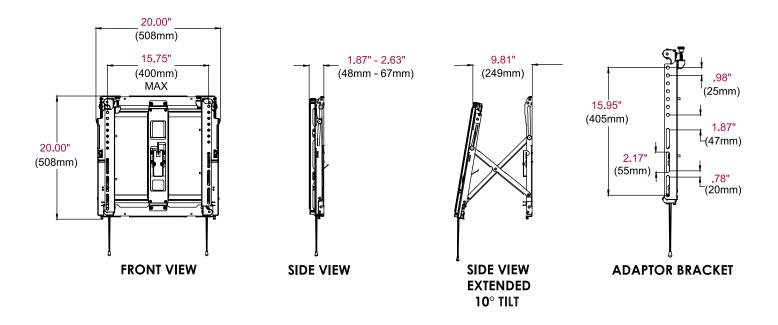|	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DS-VW755S	23.5" x 23.75" x 4.875" (597 x 603 x 124mm)	24lb (10.9kg)	735029302438	Wall mount assembly, mounting attachment rails, fasteners	1

Accessories

ACC-V800X:	Adaptor for VESA® 600 x 400 and 800 x 400mm mounting patterns
ACC-DHK:	Display Handling Kit
ACC-DHP6:	Display Handling Kit Replacement Pads - 6pk
ACC-DSVW6X4S:	Ultra Thin VESA® 600 x 400mm Adapter

All dimensions = inch (mm)

FRONT VIEW

SIDE VIEW

SIDE VIEW EXTENDED 10° TILT

ADAPTOR BRACKET

Architect Specifications

The Smartmount® Full Service Thin Video Wall Mount with Quick Release shall be a Peerless-AV model DS-VW755S and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit **peerless-av.com** to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA

(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-AV®

LIT-1189