ST680 / ST680-S ST680P / ST680P-S



FEATURES

- Universal mount fits displays with mounting patterns up to 1119 x 745mm (44.04" W x 29.31" H)
- Adjustable up to 15° of forward tilt and -5° backward tilt for optimal viewing angle
- Pre-tensioned universal tilt display adapters allow for tilt adjustment without the use of tools
- Easy-grip lever locks the display position into place
- Optional IncreLock™ feature offers fixed tilt angles of -5°, 0°, 5°, 10°, 15°
- Horizontal display adjustment of up to 12" (304mm) (depending on display model) for perfect display placement
- Universal display adapters easily hook onto wall plate for fast installation
- Mounts to wood studs, concrete, cinder block or metal studs (metal stud accessory required)
- Comes with Peerless' Sorted-for-You™ fastener pack with all necessary mounting and display attachment hardware
- Integrated security options available
- **UL** listed

Smart Mount®

Universal Tilt Wall Mount

for 61" to 102" Flat Panel Displays


Impressive installations of large to extra large flat panel displays are made simple with the ST680. Attach the pre-tensioned universal display adapters to the display, mount the wall plate anywhere on the wall and attach the easy-alide display adapters to the wall plate. The wall plate holds displays weighing up to 350lb while featuring junction box access ports and horizontal display adjustment up to 12" for ideal display positioning. Its exclusive pre-tensioned display adapter design offers quick and easy tilt viewing angle adjustment, enabling putting the final touches on the installation to be increasingly fast and simple.



Display size: 61"-102"



Max load: 350lb (158kg)

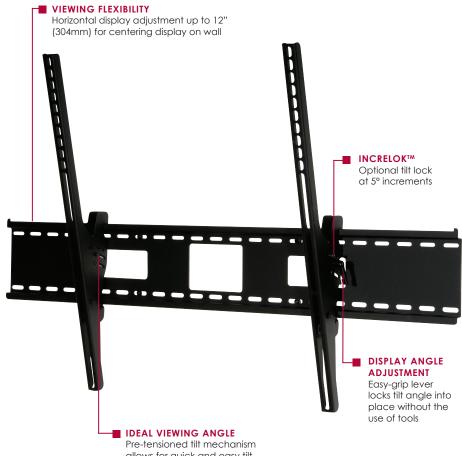





Adjustable +15/-5° tilt













WARRANTY: Limited 5-year Model Numbers

ST680(-S) Universal Tilt Wall Mount for 61" to 102" Flat Panel Displays - security models ST680P(-S) Universal Tilt Wall Mount for 61" to 102" Flat Panel Displays - standard models

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
ST680(P)(-S)	48.16" x 30.25" x 3.04"-8.77" (1223 x 768 x 77-223mm)	15.4lb (6.9kg)	350lb (158kg)	Scratch resistant fused epoxy	ST680(P): Black ST680(P)-S: Silver


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
ST680(P)(-S)	46.75" x 8.63" x 3.88" (219 x 119 x 99mm)	18.2lb (8.2kg)	\$T680: 735029242314 \$T680-\$: 735029242338 \$T680P: 735029242321 \$T680P-\$: 735029242345	Wall plate, universal display adapters, mounting and display attachment hardware	1

Accessories

ACC615: 6-pack Metal Stud Fastener Kit ACC309: Video Conference Shelf

All dimensions = inch (mm)

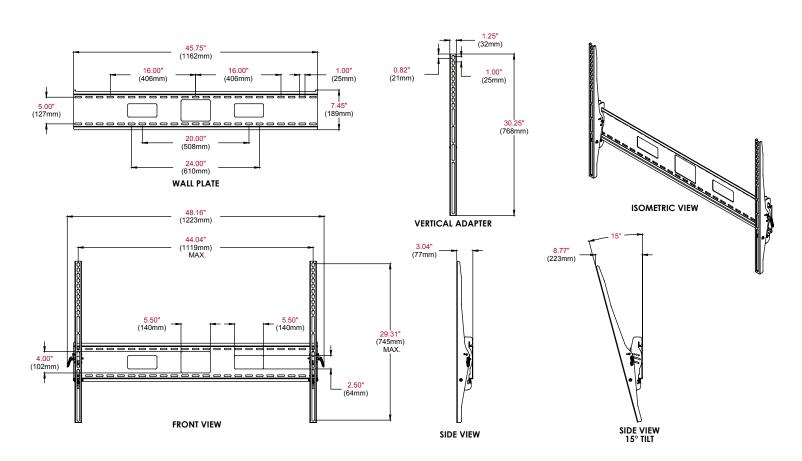

ARCHITECTS SPECIFICATIONS

The Smartmount® Universal Tilt Wall Mount shall be a Peerless model ST680 and shall be located where indicated on the plans. It shall be constructed of heavy gauge cold rolled steel and finished with scratch resistant Black or Sliver Fused Epoxy. Assembly and installation shall be done according to instructions provided by the manufacturer.

Peerless Industries, Inc. ■ 2300 White Oak Circle ■ Aurora, IL 60502 ■ (800) 865-2112 ■ (630) 375-5100 ■ Fax: (800) 359-6500 ■ www.peerless-av.com Visit www.peerless-av.com to see the complete line of AV solutions from Peerless-AV, including flat panel mounts, projector mounts, carts/stands, furniture, cables, screen cleaners and a full assortment of accessories.

