ViewSonic Method ViewBoard IFP7534


Key Features

- EPEAT Gold Certification with 20% better power efficiency than the previous generation.
- Integrated ViewSonic Education Software empowers teachers and boosts learning outcomes.
- EDLA-certified Android 14 unlocks Google Play Store access for a world of apps.
- Quad-core CPU and microSD port deliver fast performance with expandable storage.
- Dual USB-C ports power fast transfers, reliable charging, and effortless connectivity.



Product Description

Start your EdTech journey right with the ViewBoard IFP34 Series, designed with enhanced writing functionality and optimized power efficiency to meet the needs of K12 and higher education. Powered by EDLA-certified Android 14, it offers a smooth, secure user experience with full access to the Play Store for endless educational and productivity apps. Integrated ViewSonic Education Software takes it even further, adding powerful tools for digital whiteboarding, wireless casting, and centralized device management. Together, these features empower educators to create engaging, interactive learning environments, all while simplifying classroom workflows.

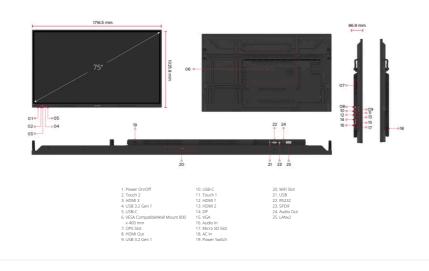

Visit Us www.viewsonic.com

Panel Size:	75"
Panel Type:	TFT LCD Module with DLED Backlight.
Display Area (mm):	1650.24(H) x 942.01(V)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160(Pixels)
Colors: Brightness:	1.07B colors 450 nits
Contrast Ratio:	5000:1 (max. with DCR enabled)
Response Time:	8ms
/iewing Angles:	H=178, V=178
Backlight Life:	50,000 Hours (8 hours of use per day)
Surface Treatment:	Hardness: 7H Anti-glare coating
Orientation:	Landscape
LATFORM	
Processor:	Quad-core
RAM:	8GB DDR4
Storage: OUCH	128 GB
ype/ Tech:	Ultra Fine Touch Technology
Fouch Resolution:	32767 x 32767
ouch Point:	40 points touch
Palm Rejection:	Yes
IPUT	
IDMI:	x3 (Front x1: HDMI2.0/HDCP 2.2/CEC; Rear x 2:HDMI2.0/HDCP 2.2/CEC/ARC for HDMI 2)
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1
S232:	x1
D/SDHC:	x1
IPS:	x1 (Optional Intel Standard OPS)
/iFi:	x1 (Optional VB-WIFI-002/VB-WIFI-004/VSB-050)
UTPUT IDMI:	HDMI 2.0 x1
udio:	x1
PDIF:	x1
AN	
RJ45:	x2
SB	
ype A:	USB3.2 Gen 1 x 4 (Front x 2; Rear x 2) USB 2.0x1 (Rear)
ype B:	USB 3.0 x2 (Rear x1 + Front x1)
уре С:	Front*1 (PD15W + DP1.2 + Data + 10M/100M sharing) Rear*1 (PD65W(15W with OPS, 65W without OPS) + DP1.2 + Data + 10M/100M sharing]
PEAKERS	
20W x 2	
OP CAMERA PLATE	
res MBEDDED OS	
Android 14 EDLA	
UNDLE SOFTWARE	
asic Annotation Software:	myViewBoard
Pro Annotation Software:	myViewBoard for Windows (Embedded in optional Windows Slot-in PC)
Vireless Presentation:	AirSync
evice Management:	Manager
/iewSonic Launcher:	Yes
PECIAL FEATURES	
	(combine slot-in PC/Android/HDMI USB port) Front
	"SmartPort™ USB" to all channels.
Simple LAN sharing between IFP nd slot-in device:	10/100M for Android & Slot-in PC
Simple LAN sharing between IFP and slot-in device: Light Sensor:	
Simple LAN sharing between IFP and slot-in device: .ight Sensor: OWER	10/100M for Android & Slot-in PC Yes
All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: OWER Voltage: Consumption:	10/100M for Android & Slot-in PC Yes 100-240V AC
Simple LAN sharing between IFP and slot-in device: Light Sensor: OWER	10/100M for Android & Slot-in PC Yes
Simple LAN sharing between IFP and slot-in device: .ight Sensor: OWER /oltage: Consumption:	10/100M for Android & Slot-in PC Yes 100-240V AC
imple LAN sharing between IFP nd slot-in device: ight Sensor: DWER foltage: consumption: RGONOMICS	10/100M for Android & Slot-in PC Yes 100-240V AC On:89.24W ; Off: < 0.5W

DIMENSIONS (W X H X D)	

Physical (inch / mm):	67.5 x 40.4 x 3.42 (in.) / 1716.5 x 1025.8 x 86.9 (mm)		
Packaging (inch / mm):	73.22 x 44.29 x 7.28 (in.) / 1860 x 1125 x 185 (mm)		
WEIGHT			
Net (lb / kg):	108.03 lb / 49 kg		
Gross (lb / kg):	133.38 lb /60.5 kg		
REGULATIONS			
FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM, & RoHS DoC, ErP, REACH SVHC List, & DoC, EEL, WEEE, BSMI,BIS			
PACKAGE CONTENTS			
 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. RS232 adapte 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m 			

COMPATIBLE SLOT-IN PC

VPC3X, VPCF5-2A, VPCF5, VPC2X, VPC-A31-O1